

MATHYS **DACFILL** **WATERPROOFING**


A ready-to-use waterbased liquid membrane for roofs

- Waterborne , super-elastic, 100% watertight
- Resistant to UV radiation, acid rain, heat, frost and pollution
- Easy to apply with a brush, roller or airless spray
- For roofs and chimney slabs (min. slope of 1%)
- Barely flammable and self-extinguishing
- Can be mechanically reinforced with Dacfill-fleece



Excellent watertightness, quickly!

Forms a lasting rubber-like coat without joints or seams on all types of roofs with slope of minimal 1%.

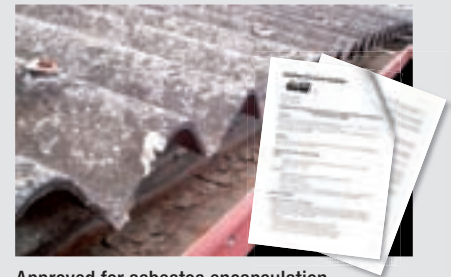

Approved for asbestos encapsulation.

Standard colours:



Available in almost any colour upon request.
 Note: Minor differences between above printed and supplied colours are possible due to printing limitations.



Extra mechanical strength can be obtained by using reinforcement fleeces.

Technical reference	
	Water based
Coverage:	0.6 – 3 kg/m ² (see product datasheet)
Dry to touch:	2 hr
Dry to recoat:	24 hrs
Colours:	See colour card
Pack sizes:	1kg, 5kg, 25kg
Substrates:	Sloped roofs (roofing, bituminous), chimney slabs, Primer 44HS, diluted Noxyde®
Recoatable with:	Dac Hydro Alu, Coating PRT