

# MATHYS DURBOCEM®

## DAMP WALL PAINT



**Solvent-based acrylic paint, 1-component**

*Ideal for painting damp walls and cellars*

- For internal and external use
- Bonds strongly with damp substrate
- Can be applied to chalking substrates
- Can be topcoated with Paracem® when the surface is dry
- For brush application


### Technical reference

	Solvent based
<b>Coverage:</b>	3 m <sup>2</sup> /l. (2 coats)
<b>Dry to touch:</b>	2 hrs
<b>Dry to recoat:</b>	24 hrs
<b>Colours:</b>	White
<b>Pack sizes:</b>	1L, 5L, 10L
<b>Substrates:</b>	Damp wall and cellars
<b>Recoat with:</b>	Paracem®




# MATHYS SECCO® SUPER

## COLOURLESS WATER REPELLENT COATING



**Colourless water repellent coating for porous exterior walls**

**Water vapour permeable (breathing)**  
**Does not change the colour of the substrate**  
**Applicable with brush, roller and airless**

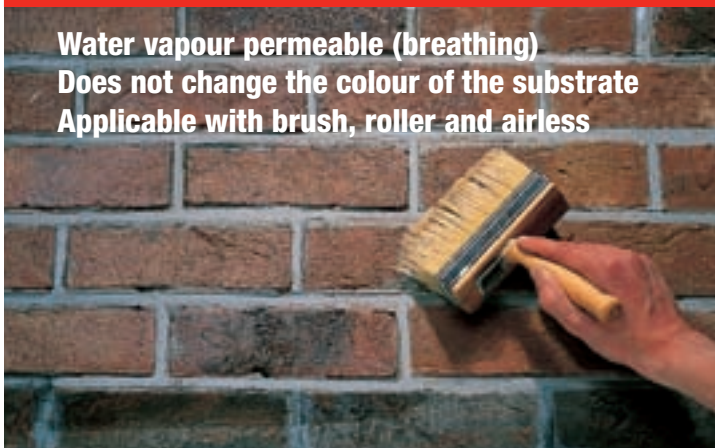

### Technical reference

	Solvent based
<b>Coverage:</b>	1-4 m <sup>2</sup> /l. per coat
<b>Dry to touch:</b>	45 min
<b>Dry to recoat:</b>	24 hrs
<b>Colours:</b>	Transparent
<b>Pack sizes:</b>	1L, 5L, 20L
<b>Substrates:</b>	Porous walls (bricks, concrete, cement)
<b>Recoat with:</b>	Not applicabe

GENERAL

METAL  
General Purpose

METAL  
Noxydizing™

METAL  
Cladding Solutions

FLOORS

EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL