

MURFILL® Waterproofing ELASTIC WATERPROOFING COATING

Single pack , satin matt finish




Tried and tested quality for waterproofing any façade.

An elastic, crack bridging and waterproofing façade coating. The microporous structure ensures that the base is constantly able to breathe. Ready for use and simple to apply on any façade. In other words: Façade protection with waterproof guarantees.

- **100 % Waterproof:** a façade treated with Murfill® Waterproofing Coating is guaranteed to remain bone-dry
- **400% Elastic:** the permanent elasticity protects your façade optimally in all circumstances and prevents tears, flaking and blistering
- **Permeable to water vapour:** the base can breathe at all times with Murfill® Waterproofing
- **Crack bridging**
- Resistant to contamination and ageing in all weather conditions and climates
- **Water-based**
- **Colourfast:** the unique Murfill®-formula means that even deep and dark colours are not affected by sunlight
- Protects reinforced concrete against carbonation, penetration of chlorides and corrosion



The high coverage and elasticity of Murfill Waterproofing Coating save your façade from ageing, damage and the permeation of damp.

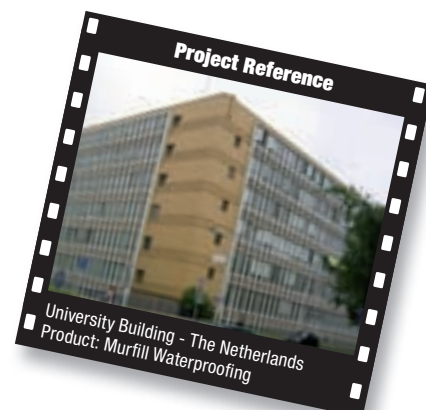

To bridge dynamic cracks and for extra mechanical reinforcement we recommend combining Murfill® Waterproofing Coating with Murfill® Membrane (woven or unwoven).



* To be able to claim on this guarantee, you must call in the assistance of a technical advisor from Rust-Oleum®. For more information about the conditions of our guarantee do not hesitate to contact your paint distributor or the technical and commercial services at Rust-Oleum®.

Technical reference

	Water based
Coverage:	300-600 g/m ² per coat, depending on application
Dry to touch:	45 min
Dry to recoat:	24 hrs
Colours:	See colour card + tintable
Pack sizes:	1kg, 6kg, 15kg
Substrates:	Walls/facades, existing (sound) paintwork, primers Pegafix®, Primer 44 and Pegalink®
Recoatable with:	Paracem®



MURFILL® QUARTZ

ELASTIC WATERPROOFING COATING

Single pack, quartz finish



An elastic, crack bridging and waterproof façade coating with fine quartz structure.

Extremely suited to camouflaging damage, renovations and small surface unevenness. Murfill® Quartz is ready to use and simple to apply and offers very attractive results.

- 100 % Waterproof
- Elastic
- Permeable to water vapour
- Extremely resistant to ageing
- Fine quartz structure camouflages unevenness



Technical reference

	Water based
Coverage:	1 – 2.5 kg/m ² per coat
Dry to touch:	4 hrs
Dry to recoat:	24 hrs
Colours:	White
Pack sizes:	6kg, 15kg
Substrates:	Masonry, concrete, brick, cellular concrete, primers Pegafix®, Primer 44 and Pegalink®
Recoat with:	Paracem®

MURFILL® RENOVATION

RENOVATING AND EMBELLISHING FAÇADES.

Single pack, matt finish



- 500% elastic
- Repairs and permanently prevents hairline cracks, even with minimal layer thickness
- Permanently elastic to -30 °C
- Permeable to water vapour
- Extremely resistant to ageing and contamination



Technical reference

	Water based
Coverage:	400 g/m ² per coat
Dry to touch:	45 min
Dry to recoat:	24 hrs
Colours:	White + tintable
Pack sizes:	6kg, 15kg
Substrates:	Walls and façades, primers Pegafix®, Primer 44 and Pegalink®
Recoat with:	Not applicable



GENERAL

METAL
General Purpose

METAL
Noxydizing™

METAL
Cladding Solutions

FLOORS

EXTERIOR WALLS

ROOFS

HYGIENE

TECHNICAL