


MATHYS PEGAKOTE®

WATERBASED EPOXY SYSTEM

2-Pack satin gloss coating for inside use

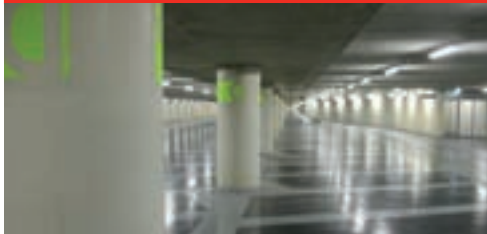

PEGAKOTE applied on a parking garage floor.

- Waterborne
- Easy to apply
- Abrasion resistant
- Virtually odourless
- Resistant to oil and solvents
- Easy to clean
- Tintable in virtually any colour



Available in almost any colour upon request (RAL, BS, AFNOR, etc.)
Note: Minor differences between printed and supplied colours are possible due to printing limitations.

Technical reference

| | |
|-----------------------|--|
| | Water based |
| Coverage: | 1st coat: 200-300 g/m ² , 2nd coat 300-400 g/m ² |
| Dry to touch: | 9 hrs |
| Dry to recoat: | 24 hrs (48 hrs at lower temperatures) |
| Colours: | See colour card + tintable |
| Pack sizes: | 4 kg, 15 kg |
| Substrates: | (indoor use only) Concrete, substrates primed with Primer 44 and Pegasol® Quartz |
| Recoat with: | Not applicable |

MATHYS PEGASOL® & PEGASOL® QUARTZ

WATERBASED VINYL ACRYLIC SYSTEM

2-Pack floor coating for indoor and outdoor

- Standard matt or quartz finish
- Easy application
- Fast drying
- Waterbased
- Abrasion resistant
- Odourless



Standard colours:



Available in almost any colour upon request (RAL, BS, AFNOR, etc.)
Note: Minor differences between printed and supplied colours are possible due to printing limitations.



Technical reference

| | |
|-----------------------|--|
| | Water based |
| Coverage: | 800 g/m ² |
| Dry to touch: | 45 minutes |
| Dry to recoat: | 6 hrs |
| Colours: | See colour card |
| Pack sizes: | 4 kg, 15 kg |
| Substrates: | (indoor use only) concrete, substrates primed with Primer 44 and Pegasol® Quartz |
| Recoat with: | In garages: Pegakote® |